



15 Cx 3 PL T 8+8Ω

15" | 800 W

Code Z008191T-8+8

Coaxial

- SNDW** LF 3" Sandwich voice coil Fiberglass former
- TD** HF Titanium dome 1,7" voice coil Flat Aluminium wire
- DAR** Cloth surround with Double Asymmetric Rolls Technology (DAR)
- WpT** Waterproof Cone Treatment
- Neodymium Magnet Circuit
- 90° Horn coverage
- 99.1 dB sensitivity
- Frequency Range 45-20000 Hz

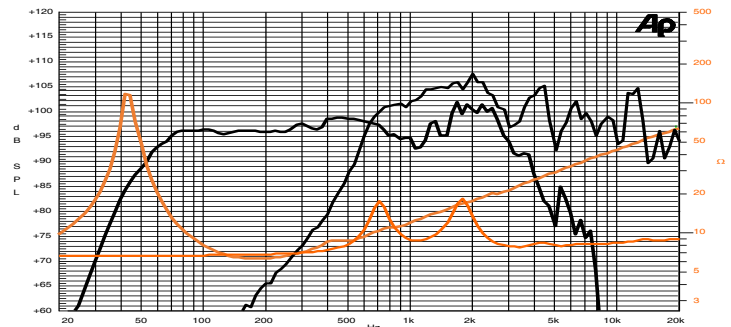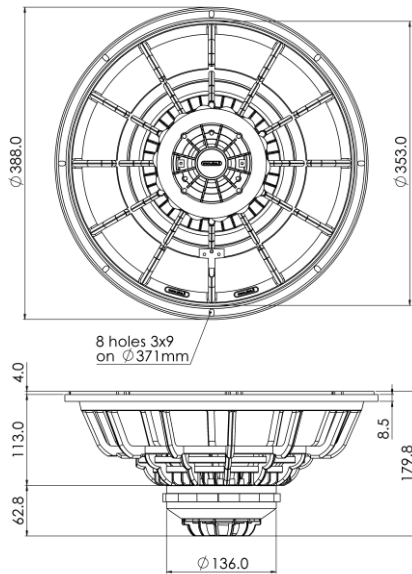

Frequency Response on 90 Lt @ 48 Hz Vented Box @ 1W, 1m
Free Air Impedance

General Specifications	LF Unit	HF Unit
Nominal Diameter	388 mm (15")	
Nominal Impedance	8 Ω	8 Ω
Rated Power AES ⁽¹⁾	400 W	60 W
Continuous Program Power ⁽²⁾	800 W	120 W
Sensitivity @ 1W/1m ⁽³⁾	99.1 dB	101.5 dB
Voice Coil Diameter	75 mm (3 in)	44 mm (1.7 in)
Voice Coil Winding Depth	17 mm	2.6 mm
Magnetic Gap Depth	10 mm	3 mm
HF Recomm. Crossover Frequency	1.6 kHz	
Magnet Weight	532 g	
Net Weight	5.3 kg	

Thiele & Small Parameters ⁽⁴⁾

Re (LF)	5.1 Ω	Fs (LF)	44.5 Hz
Re (HF)	6.0 Ω	Fs (HF)	710 Hz
Qms	12.88	Qes	0.42
Qts	0.40	Mms	87.2 g
Cms	147 μm/N	Bxl	17.26 Tm
Vas	152.4 l	Sd	855.3 cm ²
X max ⁽⁵⁾	+/-5.5 mm	X var ⁽⁶⁾	+/-8.0 mm
η _o	3.10 %	Le (1kHz)	1.12 mH

Constructive Characteristics

Magnet	Neodymium
Basket Material	Aluminium Die-Cast
LF Voice Coil Winding/Former Material	Copper / Fiberglass
HF Voice Coil Winding/Former Material	Aluminium Flat Wire / Kapton
LF Cone Material	Paper
HF Dome Material	Titanium
Surround Material	Treated Cloth
HF Spare Part Code	Z009395T-FI

Mounting Information

Overall Diameter	388 mm
Baffle Cutout Diameter	355 mm
Mounting Holes	8 holes 6x9 on ø371 mm
Total Depth	178.9 mm

⁽¹⁾ Rated Power measured with 2-hour test with pink noise signal, 6dB crest factor, loudspeaker in free air, power calculated on rated Zmin. ⁽²⁾ Power on Continuous Program is defined as 3dB greater than the Rated Power. ⁽³⁾ Calculated by Thiele & Small parameters, for SPL average in box refer to frequency response. ⁽⁴⁾ Thiele & Small parameters measured with laser system after preconditioning test. ⁽⁵⁾ Measured with respect to a THD of 10%. ⁽⁶⁾ Value corresponding to a decay of the Force Factor, or Compliance, or both, equal to the 50% of the small signal value. ⁽⁷⁾ Drawing dimensions: mm.

Due to continuing product improvement, the features and the design are subject to change without notice.